

light on your work


X-START

6X160W LED - 9M **Kubota**



TRIME

Lighting Tower Specialist



X-START

6X160W LED - 9M **Kubota**


Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-START LED has been created beginning from these characteristics. It is the best solution to your needs and guarantees 4200 sqm of illuminated area. 14 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



- Multi-directionally adjustable and tiltable floodlights
- 7 sections vertical tower 8,5 m, 340° rotatable
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 14 units per truck
- Central lifting eye, forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Certified wind stability up to 80 km/h
- 5 height adjustable stabilizers
- On board levels for guidance during stabilization

APPLICATIONS

- Special events
- Rural & hard to reach areas
- Emergency response
- Construction & work sites
- Gas, oil & mining operations
- Military applications

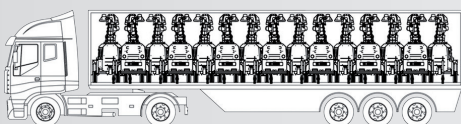

14
Units Per Truck



You can place 14 units on a single vehicle thanks to one of the compactest footprints on the market.


KEY BENEFITS

✔ *Easy to move*

✔ *Robustness*

✔ *Safety*

✔ *Cost effective*

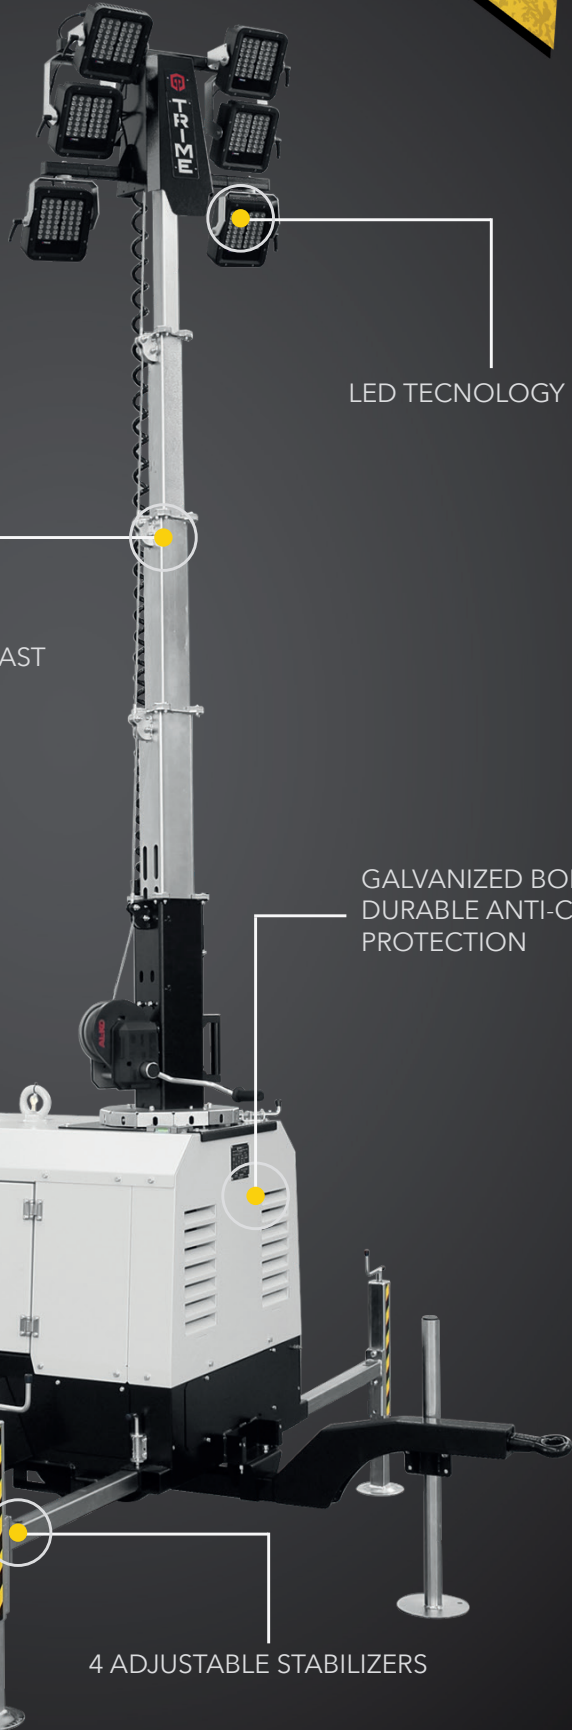

LED TECHNOLOGY

SAFETY VERTICAL MAST

GALVANIZED BODY
DURABLE ANTI-CORROSION
PROTECTION

FORK LIFT POCKET

4 ADJUSTABLE STABILIZERS

technical data

Dimensions & weight	
Dimensions min. (mm)	1830x1370x2560
Dimensions max. (mm)	2420x2530x8500
Total weight without fuel	706 Kg


Features	
Rotation	340°
Floodlights	6x160W
Lamps	LED
Options	Homologated road trailer

Alternator	
Model	Synchronous
Frequency (Hz)	50
Insulation class	H
Degree of protection	IP23
Single phase voltage	3,5 kVA - 230V
Auxiliary outlets	1 kVA

Engine	
Model	Kubota Z482
Fuel	Diesel
r.p.m	1500
Tank capacity (l)	80
Consumption (l/h)	0,55
Running time (h)	145
Noise level (dBA) at 7m	65

Standard load delivery



14 sets



Units Per Truck

Illuminated area

4200 sqm

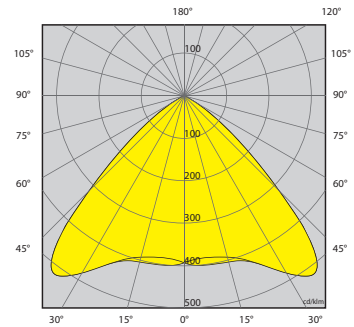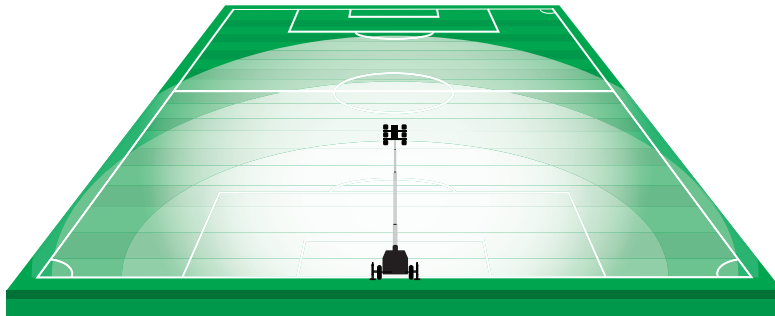

Lighting Tower Specialist

TRIME s.r.l.

Strada per Robecco, snc
 20081 Cassinetta di Lugagnano (MI) - Italy
 Tel. +39 02 942 1724
 Sales Dept. +39 0382 406 252
 www.trime.it - info@trime.it